

# Document made available under the Patent Cooperation Treaty (PCT)

International application number: PCT/GB05/000311

International filing date: 28 January 2005 (28.01.2005)

Document type: Certified copy of priority document

Document details: Country/Office: GB  
Number: 0401947.7  
Filing date: 28 January 2004 (28.01.2004)

Date of receipt at the International Bureau: 28 February 2005 (28.02.2005)

Remark: Priority document submitted or transmitted to the International Bureau in compliance with Rule 17.1(a) or (b)



World Intellectual Property Organization (WIPO) - Geneva, Switzerland  
Organisation Mondiale de la Propriété Intellectuelle (OMPI) - Genève, Suisse



PCT/GB2005/000311



INVESTOR IN PEOPLE

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.




Signed

*Stephen Hordley*

Dated 15 February 2005



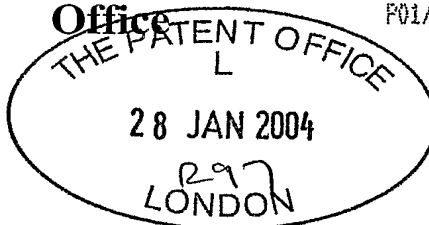

**Request for grant of a patent**

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

1. Your reference T3110 (C)/rkk

---

2. Patent application number 0401947.7 28 JAN 2004  
(The Patent Office will fill this part in)

---

3. Full name, address and postcode of the or of each applicant (underline all surnames) UNILEVER PLC  
UNILEVER HOUSE, BLACKFRIARS  
LONDON, EC4P 4BQ  
  
 Patents ADP number (if you know it) 50426956002 ✓  
  
 If the applicant is a corporate body, give the country/state of its incorporation UNITED KINGDOM

---

4. Title of the invention POROUS BODIES AND METHOD OF  
PRODUCTION THEREOF

---

5. Name of your agent (if you have one) THACKER Michael Anthony  
  
 "Address for Service" in the United Kingdom to which all correspondence should be sent (including the postcode) PATENT DEPARTMENT, UNILEVER PLC  
COLWORTH HOUSE, SHARNBROOK  
BEDFORD, MK44 1LQ  
  
 Patents ADP number (if you know it) 1628003

---

6. Priority: Complete this section if you are declaring priority from one or more earlier patent applications, filed in the last 12 months.
 

Country	Priority application number (if you know it)	Date of filing (day / month / year)

---

7. Divisionals, etc: Complete this section only if this application is a divisional application or resulted from an entitlement dispute (see note f)
 

Number of earlier application	Date of filing (day / month / year)


---

8. Is a Patents Form 7/77 (Statement of inventorship and of right to grant of a patent) required in support of this request?  
 Answer YES if:  
 a) any applicant named in part 3 is not an inventor, or  
 b) there is an inventor who is not named as an applicant, or  
 c) any named applicant is a corporate body.  
 Otherwise answer NO (See note d) YES

# Patents Form 1/77

9. Accompanying documents: A patent application must include a description of the invention. Not counting duplicates, please enter the number of pages of each item accompanying this form:

Continuation sheets of this form


Description	23
Claim(s)	5 
Abstract	1
Drawing(s)	-

10. If you are also filing any of the following, state how many against each item.

## Priority Documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for preliminary examination and search (Patents Form 9/77) 1 

Request for substantive examination (Patents Form 10/77)

Any other documents (please specify)

11. I/We request the grant of a patent on the basis of this application.

Signature(s) 

Date: 28-01-04

**Sandra Jane EDWARDS, Authorised Signatory**  
**Ravinder K Kundra (01234) 22 2439**  
**Ravinder.k.kundra@unilever.com**

12. Name, daytime telephone number and e-mail address, if any, of person to contact in the United Kingdom

## Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

## Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 08459 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered YES in part 8, a Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- Part 7 should only be completed when a divisional application is being made under section 15(4), or when an application is being made under section 8(3), 12(6) or 37(4) following an entitlement dispute. By completing part 7 you are requesting that this application takes the same filing date as an earlier UK application. If you want the new application to have the same priority date(s) as the earlier UK application, you should also complete part 6 with the priority details.

POROUS BODIES AND METHOD OF PRODUCTION THEREOF

The present invention relates to porous bodies which are soluble or dispersible in non-aqueous media and to methods of  
5 producing such porous bodies.

Copending international patent application PCT/GB03/03226 (assigned to the present applicants) describes the formation of porous beads comprising a three dimensional open-cell lattice of  
10 a water-soluble polymeric material with an average bead diameter in the range 0.2 to 5mm.

It is an object of the present invention to provide highly porous bodies which dissolve or disperse rapidly when contacted with non  
15 aqueous media. It is a further object of the invention to provide a simple and effective method for producing such porous bodies.

In accordance with a first aspect of the invention, there is  
20 provided porous bodies which are soluble or dispersible in non-aqueous media comprising a three dimensional open-cell lattice containing

(a) 10 to 95% by weight of a polymeric material which is soluble in water immiscible non-aqueous media and  
25 (b) 5 to 90% by weight of a surfactant,  
said porous bodies having an intrusion volume as measured by mercury porosimetry (as hereinafter described) of at least about 3 ml/g

30 Preferably the porous bodies of the present invention contain 10 to 80% by weight of the polymeric material and 20 to 90% by weight of the surfactant. More preferably the porous bodies of

the present invention contain 20 to 70% by weight of the polymeric material and 30 to 80% by weight of the surfactant.

It is also important for the operation of the present invention that the porous bodies dissolve or disperse quickly so that the materials contained within the lattice are dispersed quickly when the porous bodies are exposed to a non-aqueous medium. The nature of the lattice should be such that the dispersion of the porous bodies occurs in less than three minutes preferably less than 2 minutes, more preferably less than 30 seconds.

Suitable polymeric materials include homopolymers and copolymers made from one or more of the following (co)monomers:-

Alkenes for example ethylene or propylene; dienes for example butadiene; urethanes; vinyl esters for example vinyl acetate; styrenics for example styrene or alpha-methyl styrene; alkyl (meth)acrylates for example methyl methacrylate or butyl acrylate; alkyl (meth)acrylamides for example butyl acrylamide or decyl methacrylamide; (meth)acrylonitrile; vinyl ethers for example methyl vinyl ether; Imides; amides; anhydrides, esters; ethers, carbonates; isothiocyanates; silanes; siloxanes; sulphones; aliphatic and aromatic alcohols for example ethylene glycol or 1,4-benzene dimethanol; aromatic and aliphatic acids for example phthalic acid or adipic acid; aromatic and aliphatic amines for example hexamethylene diamine.

When the polymeric material is a copolymer it may be a statistical copolymer (heretofore also known as a random copolymer), a block copolymer, a graft copolymer or a hyperbranched copolymer. Comonomers other than those listed above may also be included in addition to those listed if their presence does not destroy the water insoluble nature of the resulting polymeric material.

Examples of suitable homopolymers include polyvinyl acetate, polystyrene, polyethylene, polypropylene, polybutadiene, polyethyleneterephthalate, nylon, polydimethylsiloxane, 5 polybutylisocyanate, poly (1-octene-co-sulphur dioxide)

The surfactant may be non-ionic, anionic, cationic, non-ionic, or zwitterionic and is preferably solid at ambient temperature. Examples of suitable non-ionic surfactants include 10 ethoxylated triglycerides; fatty alcohol ethoxylates; alkylphenol ethoxylates; fatty acid ethoxylates; fatty amide ethoxylates; fatty amine ethoxylates; sorbitan alkanates; ethylated sorbitan alkanates; alkyl ethoxylates; pluronics; alkyl polyglucosides; stearyl ethoxylates. Examples of suitable anionic surfactants 15 include alkylether sulfates; alkylether carboxylates; alkylbenzene sulfonates; alkylether phosphates; dialkyl sulfosuccinates; alkyl sulfonates; soaps; alkyl sulfates; alkyl carboxylates; alkyl phosphates; paraffin sulfonates; secondary n-alkane sulfonates; alpha-olefin sulfonates; isethionate 20 sulfonates. Examples of suitable cationic surfactants include fatty amine salts; fatty diamine salts; quaternary ammonium compounds; phosphonium surfactants; sulfonium surfactants; sulfonxonium surfactants. Examples of suitable zwitterionic surfactants include N-alkyl derivatives of amino acids (such as 25 glycine, betaine, aminopropionic acid); imidazoline surfactants; amine oxides; amidobetaines. Mixtures of surfactants may be used.

The bulk density of the porous polymeric bodies is preferably in 30 the range of from about 0.01 to about 0.3 g/cm<sup>3</sup>, more preferably from about 0.05 to about 0.2 g/cm<sup>3</sup>, and most preferably from about 0.08 to about 0.15 g/cm<sup>3</sup>.



The porous bodies of the present invention may be formed by freezing an intimate mixture (for example an emulsion) of the polymeric material and the surfactant in a liquid medium and freeze drying the resulting frozen mixture.

5

The porous bodies of the present invention disperse when exposed to a non-aqueous medium. The non-aqueous media to which the porous bodies are exposed may be any non-aqueous liquid into which the porous bodies can be dissolved or dispersed. The term  
10 "non-aqueous" as used herein includes liquids which contain minor amounts of water but which would be considered by those skilled in the art to be substantially non-aqueous. The non-aqueous media to which the porous bodies are exposed may be water-miscible or water immiscible. The non-aqueous media may be a water  
15 immiscible organic solvent for example alkanes such as heptane, n-hexane, isooctane, dodecane, decane; cyclic hydrocarbons such as toluene, xylene, cyclohexane; halogenated alkanes such as dichloromethane, dichloroethane, trichloromethane (chloroform), fluorotrichloromethane and tetrachloroethane; esters such as  
20 ethyl acetate; ketones such as 2-butanone; ethers such as diethyl ether; and mixtures thereof. Examples of suitable water miscible organic solvents include alcohols such as methanol, ethanol, isopropanol; and acetone; acetonitrile or tetrahydrofuran. Non-organic liquids such as volatile silicones (e.g. cyclomethicone)  
25 may also be used as the non-aqueous media to which the porous bodies are exposed.

By including a polymeric material which is soluble in non-aqueous media in the lattice of porous bodies, porous bodies  
30 are formed which disperse rapidly in non-aqueous media. The polymeric material and any other components carried in the porous bodies will therefore become dispersed/dissolved in the non-aqueous medium. The provision of the porous bodies

of the present invention facilitates the dissolution or dispersion of the materials contained in the porous bodies in non-aqueous media and the dissolution/dispersion is more rapid than is observed when the same materials are used but  
5 are not in the form required by the present invention.

The present invention also includes, in a further aspect, solutions or dispersions comprising polymeric materials and surfactant formed by exposing the porous bodies of the  
10 present invention to a non-aqueous medium.

The present invention also includes, in a further aspect, solutions or dispersions comprising polymeric materials, surfactant and a water-soluble (hydrophilic) material formed  
15 by exposing the porous bodies of the present invention having the hydrophilic material contained therein to a non-aqueous medium.

The porous bodies of the present invention may include within the  
20 lattice, water soluble materials which will be dispersed when the polymeric bodies are dispersed in a non-aqueous medium. The water soluble materials may be incorporated into the lattice by dissolving them in the liquid medium from which they are made. It has been found that the dispersion into a non-aqueous medium of  
25 water-soluble materials contained within the porous bodies of the present invention is much improved when the porous bodies are exposed to the non-aqueous medium. Examples of suitable water soluble materials include:- Water soluble vitamins such as vitamin C; water soluble fluorescers such as 4,4'-  
30 bis(sulfostyryl)biphenyl disodium salt (sold under the trade name Tinopal CBS-X; activated aluminium chlorohydrate; transition metal complexes used as bleaching catalysts; water soluble polymers such as modified polyesters of isophthalic acid), gerol,

xanthan gum, jaguar or polyacrylates; diethylenetriamine pentaacetic acid; primary and secondary alcohol sulphates such as commercially examples eg cocoPAS or mixtures thereof

5 The porous bodies of the present invention may include within the lattice water-insoluble materials which will be dispersed when the polymeric bodies are dispersed in an non-aqueous medium. The water-insoluble materials may be incorporated into the lattice by dissolving them in the continuous oil phase of a water-in-oil  
10 emulsion from which the lattice is made. Examples of suitable water insoluble materials include antimicrobial agents; antidandruff agent; skin lightening agents; fluorescing agents; antifoams; hair conditioning agents; fabric conditioning agents; skin conditioning agents; dyes; UV protecting agents; bleach or  
15 bleach precursors; antioxidants; insecticides; pesticides; herbicides; perfumes or precursors thereto; flavourings or precursors thereto; pharmaceutically active materials; hydrophobic polymeric materials and mixtures thereof.

20 It may be required to disperse the hydrophilic materials at the point where the product is being used. In this case the porous bodies of the present invention will be contained in the product until it is used by exposing it to a non-aqueous environment, at which time the lattice of the porous body  
25 will break down releasing the hydrophilic material.

The porous bodies of the present invention may be used to introduce hydrophilic materials into products, for example, liquid products during the manufacture of the products. In this  
30 case the lattice of the porous bodies of the present invention will break down when the porous bodies contact a non-aqueous environment during manufacture releasing the hydrophilic material

in a form in which it can be more readily incorporated into the product being manufactured.

5 The porous bodies of the present invention may be used to transport materials to sites where they can be incorporated into products. By converting liquid products into porous bodies the need to transport large amounts of liquids can be avoided resulting in significant cost savings and safer transport of materials which are potentially hazardous when transported in a liquid form. Materials which would be potentially unstable if  
10 stored or transported in liquid form may be incorporated into the porous bodies of the present invention and stored or transported with less risk of degradation.

15 The incorporation of potentially unstable hydrophilic materials into the porous bodies of the present invention may protect them from degradation during storage prior to use.

The intrusion volume of the porous bodies as measured by mercury porosimetry (as hereinafter described) is preferably at least  
20 about 4 ml/g, even more preferably at least about 5ml/g, and most preferably at least about 6 ml/g. For example, the intrusion volume may be from about 3 ml/g to about 30 ml/g, preferably from about 4 ml/g to about 25ml/g, more preferably from about 7 ml/g  
25 to about 20ml/g. Intrusion volume provides a good measure of the pore volume in materials of this general type. The polymeric porous bodies may be in the form of powders, beads or moulded bodies. Powders may be prepared by the disintegration of porous bodies in the form of beads or moulded bodies.

30

In accordance with another aspect of the present invention, there is provided a method for preparing porous bodies which are

soluble or dispersible in non-aqueous media comprising a three dimensional open-cell lattice containing

(a) 10 to 95% by weight of a polymeric material which is soluble in water-immiscible non-aqueous media and

5 (b) 5 to 90% by weight of a surfactant,

said porous bodies having an intrusion volume as measured by mercury porosimetry (as hereinafter described) of at least about 3 ml/g

said process comprising the steps of

10 a) providing an intimate mixture of the polymeric material and the surfactant in a liquid medium

b) providing a fluid freezing medium at a temperature effective for rapidly freezing the liquid medium;

15 c) cooling the liquid medium with the fluid freezing medium at a temperature below the freezing point of the liquid medium for a period effective to rapidly freeze the liquid medium; and

(d) freeze-drying the frozen liquid medium to form the porous bodies by removal of the liquid medium by sublimation.

20

The intimate mixture of the polymeric material and the surfactant in the liquid medium may be a water-in-oil emulsion comprising a continuous oil phase containing the polymeric material, a discontinuous aqueous phase and the surfactant;

25

When the porous body is to be in the form of a powder the cooling of the liquid medium may be accomplished by spraying an atomised liquid medium into the fluid freezing medium. When the porous body is to be in the form of beads the cooling of the liquid medium may be accomplished by dropping drops of the liquid medium  
30 into the fluid freezing medium. Porous bodies in the form of moulded bodies may be made by pouring the liquid medium into a mould and cooling the liquid medium by the fluid freezing medium.

In a preferred process of the invention to make moulded bodies, the liquid medium is poured into a pre-cooled mould surrounded by fluid freezing medium.

5 The frozen liquid medium may be freeze-dried by exposing the frozen liquid medium to high vacuum. The conditions to be used will be well known to those skilled in the art and the vacuum to be applied and the time taken should be such that all the frozen liquid medium present has been removed by sublimation. In the  
10 case of moulded porous polymeric bodies the freeze drying may take place with the frozen liquid medium still in the mould. Alternatively, the frozen liquid medium may be removed from the mould and freeze-dried in a commercial freeze-drier. The freeze-drying step may be performed for up to around 72 hours in  
15 order to obtain the porous bodies of the present invention.

The above process preferably uses a water-in-oil emulsion which comprises a continuous oil phase with the polymeric material dissolved therein, a discontinuous aqueous phase and the  
20 surfactant which is to be incorporated into the porous bodies of the present invention and which acts as an emulsifier for the emulsion. Preferably, the polymeric material is present in the continuous phase in a concentration of about 1% to 50% by weight. Even more preferably, the polymeric material is present in the  
25 continuous phase in a concentration of about 3% to 10% by weight. Surfactants suitable for use as emulsifiers in water-in-oil emulsions preferably have an HLB value in the range 3 to 6. It is preferred that the surfactant is present in the liquid medium in a concentration of about 1% to about 60% by weight. More  
30 preferably, the surfactant is present in the liquid medium in a concentration of about 2 % to about 40 % by weight and a yet more preferred concentration is about 5% to about 25% by weight.

The continuous oil phase of the oil-in-water emulsion preferably comprises a material which is immiscible with the aqueous phase, which freezes at a temperature above the temperature which is effective for rapidly freezing the liquid medium and which is removable by sublimation during the freeze drying stage. The continuous oil phase of the emulsion may be selected from one or more from the following group of organic solvents:-

alkanes such as heptane, n-hexane, isooctane, dodecane, decane;  
cyclic hydrocarbons such as toluene, xylene, cyclohexane;  
10 halogenated alkanes such as dichloromethane, dichloroethane, trichloromethane (chloroform), fluorotrichloromethane and tetrachloroethane;  
esters such as ethyl acetate;  
ketones such as 2-butanone;  
15 ethers such as diethyl ether;  
volatile cyclic silicones such as cyclomethicone

Preferably, the aqueous phase comprises from about 10 % to about 95 % v/v of the emulsion, more preferably from about 20 % to about 60 % v/v.

In the process of the invention the fluid freezing medium is preferably inert to the polymeric material. Preferably, the fluid freezing medium is at a temperature below the freezing point of all of the components and is preferably at a much lower temperature to facilitate rapid freezing. The fluid freezing medium is preferably a liquified substance which is a gas or vapour at standard temperature and pressure. The liquified fluid freezing medium may be at its boiling point during the freezing of the liquid medium or it may be cooled to below its boiling point by external cooling means. The fluid freezing medium may be selected from one or more of the following group; liquid air, liquid nitrogen (b.p.  $-196^{\circ}\text{C}$ ), liquid ammonia (b.p.  $-33^{\circ}\text{C}$ ),

liquified noble gas such as argon, liquefied halogenated hydrocarbon such as trichloroethylene, chlorofluorocarbon, freon, hexane, dimethylbutene, isoheptane or cumene. Mixtures of organic liquids and solid carbon dioxide may also be used as the fluid freezing medium. Examples of suitable mixtures include chloroform or acetone and solid carbon dioxide ( $-77^{\circ}\text{C}$  and diethyl ether and solid carbon dioxide ( $-100^{\circ}\text{C}$ ). The fluid medium is removed during freeze drying preferably under vacuum and may be captured for reuse. Due to the very low boiling temperature, inertness, ease of expulsion and economy, liquid nitrogen is the preferred fluid freezing medium.

The emulsions are typically prepared under conditions which are well known to those skilled in the art, for example, by using a magnetic stirring bar, a homogenizer, or a rotator mechanical stirrer.

The porous bodies produced usually comprise of two types of pores which are produced during the freeze drying step. One is from the sublimation of the oil phase material. This pore structure can be varied by varying the polymer, the polymer molecular weight, the polymer concentration, the nature of the discontinuous phase and/or the freezing temperature. The other kind of pore structure results from the sublimation of the ice formed by the freezing of the water in the aqueous phase.

The method for producing porous bodies according to the present invention, will now be more particularly described, by way of example only, with reference to the accompanying Examples.

In the Examples that follow the intrusion volume and bulk density are measured by mercury porosimetry as described below and the dissolution time is measured as described below.



### Mercury porosimetry

Pore intrusion volumes and bulk densities were recorded by  
5 mercury intrusion porosimetry using a Micromeritics Autopore  
IV 9500 porosimeter over a pressure range of 0.10 psia to  
60000.00 psia. Intrusion volumes were calculated by  
subtracting the intrusion arising from mercury  
interpenetration between beads (pore size > 150  $\mu\text{m}$ ) from the  
10 total intrusion.

### Dissolution Time

A weighed sample of the polymeric bodies was stirred gently  
15 with a non-aqueous solvent until the stirred mixture was  
clear to the eye. The time at which the mixture became  
clear to the eye was recorded as the dissolution time

#### Example 1

20 An experiment was conducted in order to produce highly porous  
bodies which are soluble or dispersible in non-aqueous media in  
which the polymeric material is polyvinyl acetate. These bodies  
contained about 28.5% w/w polymer and about 71.5% w/w surfactant.  
The bodies were prepared by freezing a water-in-oil emulsion in  
25 liquid nitrogen. The emulsion comprised a continuous toluene  
phase containing polyvinyl acetate and a discontinuous phase  
comprising water. Sodium dioctylsulfosuccinate (AOT) was used as  
the surfactant.

30 A 5% solution of polyvinyl acetate in toluene was prepared by  
adding polyvinyl acetate (PVAc  $M_w = 83000$ ) to toluene. A sample  
of the solution (2ml) was stirred with a type RW11 Basic IKA

paddle stirrer, and AOT (0.25g) was added followed by water (6ml) to form an emulsion having 75% v/v of discontinuous phase.

Example 1a

- 5 The above emulsion was sprayed into liquid nitrogen from an airbrush. The frozen emulsion was placed in a freeze-drier overnight to give porous bodies in the form of a powder.

Example 1b

- 10 The above emulsion was placed in a beaker which was placed in liquid nitrogen to freeze the emulsion. The frozen emulsion in the beaker was placed in a freeze drier overnight to give a porous moulded body shaped as the inside of the beaker.

15 Example 2

An experiment was conducted in order to produce highly porous bodies which are soluble or dispersible in non-aqueous media in which the polymeric material is polyvinyl acetate. These bodies contained about 50% w/w polymer and about 50% w/w surfactant.

- 20 The bodies were prepared by freezing a water-in-oil emulsion in liquid nitrogen. The emulsion comprised a continuous toluene phase containing polyvinyl acetate and a discontinuous phase comprising water. Sodium dioctylsulfosuccinate (AOT) was used as the surfactant.

25

A 5% solution of polyvinyl acetate in toluene was prepared by adding polyvinyl acetate (PVAc  $M_w = 83000$ ) to toluene. A sample of the solution (4ml) was stirred with a type RW11 Basic IKA paddle stirrer, and AOT (0.2g) was added followed by toluene

30 (6ml) to form an emulsion having 50% v/v of discontinuous phase.

A beaker was placed in a thermostatic vessel and liquid nitrogen was placed in both the beaker and the vessel. The emulsion

prepared above was added dropwise from a needle to the liquid nitrogen in the beaker using a A-99 FZ Razel syringe pump. The beaker was placed in a freeze drier overnight to give spherical beads

5

### Example 3

An experiment was conducted in order to produce highly porous bodies in which the polymeric material is polystyrene (PS). The

10 powder contained about 77% w/w polymer and about 23% w/w surfactant. These bodies were prepared by freezing a water-in-oil emulsion in liquid nitrogen. The emulsion comprised a continuous cyclohexane phase containing PS and a discontinuous aqueous phase. Dioctylsulfosuccinate (AOT) was used as the  
15 surfactant.

A 10% aqueous solution of PS was prepared by adding PS (ex Polysciences  $M_w = 30000$ ) to cyclohexane. A sample of the solution (2ml) was stirred with a type RW11 Basic IKA paddle  
20 stirrer, and AOT (0.03 g/ml of PS solution) was added followed by water (6ml) to form an emulsion having 75% v/v of discontinuous phase.

### Example 3a

25 The above emulsion was sprayed into liquid nitrogen from an airbrush. The frozen emulsion was placed in a freeze-drier overnight to give porous bodies in the form of a powder.

### Example 3b

30 The above emulsion was placed in a beaker which was placed in liquid nitrogen to freeze the emulsion. The frozen emulsion in the beaker was placed in a freeze drier overnight to give a porous moulded body shaped as the inside of the beaker.

Example 4

An experiment was conducted in order to produce highly porous  
5 bodies in which the polymeric material is polystyrene (PS). The  
powder contained about 77% w/w polymer and about 23% w/w  
surfactant. These bodies were prepared by freezing a water-in-  
oil emulsion in liquid nitrogen. The emulsion comprised a  
continuous cyclohexane phase containing PS and a discontinuous  
10 aqueous phase. Dioctylsulfosuccinate (AOT) was used as the  
surfactant.

A 10% aqueous solution of PS in cyclohexane was prepared by  
adding PS (ex Polysciences  $M_w = 30000$ ) to cyclohexane. A  
15 sample of the solution (2ml) was stirred with a type RW11 Basic  
IKA paddle stirrer, and AOT (0.06g) was added followed by water  
(6ml) to form an emulsion having 75% v/v of discontinuous phase.  
The above emulsion was placed in a beaker which was placed in  
liquid nitrogen to freeze the emulsion. The frozen emulsion in  
20 the beaker was placed in a freeze drier overnight to give a  
porous moulded body shaped as the inside of the beaker.

The intrusion volume and the bulk density were measured using  
25 mercury porosimetry as described above. The dissolution data was  
determined by taking a sample of the moulded body (0.1g) in  
cyclohexane (2ml) at 20°C. The results obtained are given in  
Table 1.

30

In a similar manner to that described above moulded bodies were  
prepared. The emulsions from which these bodies were prepared

contained PS (2ml - 10 wt% solution in cyclohexane) and AOT (as set out in Table 1 below) and the appropriate volume of water

Table 1

5

Ex	Amount of Surfactant (g)	% discontinuous phase	% polymer	% surfactant	Intrusion volume (ml/g)	Dissolution time at 20 °C (min)	Bulk density (g/cm <sup>3</sup> )
4	0.06	75	77	23	5.73	0.58	0.14
4a	0.0092	75	96	4		1.42	
4b	0.028	75	88	12		1.63	
4c	0.082	75	71	29		1.67	
4d	0.238	75	46	54		2.58	
4e	0.2	20	50	50		0.42	
4f	0.1	50	67	33		0.75	

By way of comparison it has been observed that the polystyrene as supplied by the manufacturer had a dissolution time of around 58 minutes.

10

#### Example 5

An experiment was conducted in order to produce highly porous bodies in which the polymeric material is polystyrene (PS). These bodies contained about 77% w/w polymer and about 23% w/w surfactant. These bodies were prepared by freezing a water-in-oil emulsion in liquid nitrogen. The emulsion comprised a continuous cyclohexane phase containing PS and a discontinuous aqueous phase. Sorbitan oleate (SPAN 80) was used as the surfactant.

A 10% solution of PS in cyclohexane was prepared by adding PS (ex Polysciences  $M_w = 30000$ ) to cyclohexane. A sample of the solution (3ml) was stirred with a type RW11 Basic IKA paddle stirrer, and sorbitan oleate (0.1ml ex Aldrich) was added followed  
5 by water (9ml) to form an emulsion having 75% v/v of discontinuous phase.

The above emulsion was placed in a beaker which was placed in liquid nitrogen to freeze the emulsion. The frozen emulsion in  
10 the beaker was placed in a freeze drier overnight to give a porous moulded body shaped as the inside of the beaker.

In a similar manner to that described above moulded bodies were prepared from emulsions having 0%, 30% and 67 v/v of  
15 discontinuous phase. The emulsions from which these bodies were prepared using PS (3ml - 10 wt% solution in cyclohexane) and sorbitan oleate (0.1ml/3ml PS solution) and the appropriate volume of water

20 In the Table below the moulded body identified as containing 0% continuous phase was prepared from the PS solution and the sorbitan oleate with no water. The intrusion volume and the bulk density were measured using mercury porosimetry as described above. The dissolution data was determined by taking a sample of  
25 the moulded body (0.1g) in cyclohexane (2ml) at 20°C. The results obtained are given in Table 2.

Table 2

% Discontinuous phase	Intrusion Volume (ml/g)	Bulk density (g/ml)	Dissolution time at 20°C (seconds)
0	4.22	0.19	62
30	3.70	0.15	38
67		0.27	42
75	2.76	0.27	14

By way of comparison it has been observed that the polystyrene as supplied by the manufacturer had a dissolution time of around 58 minutes.

#### Example 6

10 An experiment was conducted in order to produce highly porous bodies in which the polymeric material is polystyrene (PS). These bodies contained about 71% w/w polymer and about 29% w/w surfactant. These bodies were prepared by freezing a water-in-oil emulsion in liquid nitrogen. The emulsion comprised a  
15 continuous cyclohexane phase containing PS and a discontinuous aqueous phase. Steareth-2 (Brij-72) was used as the surfactant.

A 10% solution of PS in cyclohexane was prepared by adding PS (ex Polysciences  $M_w = 30000$ ) to cyclohexane. A sample of the  
20 solution (3ml) was stirred with a type RW11 Basic IKA paddle stirrer, and steareth-2 (0.12g) was added followed by water (9ml) to form an emulsion having 75% v/v of discontinuous phase.

The above emulsion was placed in a beaker which was placed in  
25 liquid nitrogen to freeze the emulsion. The frozen emulsion in

the beaker was placed in a freeze drier overnight to give a porous moulded body shaped as the inside of the beaker.

The intrusion volume and the bulk density were measured using mercury porosimetry as described above and were found to be 4.22 ml/g and 0.166 g/cm<sup>3</sup> respectively.

#### Example 7

An experiment was conducted in order to produce highly porous bodies containing a hydrophilic dye, which bodies are soluble or dispersible in non-aqueous media in which the polymeric material is polyvinyl acetate. These bodies contained about 28% w/w polymer, about 69% w/w surfactant and about 3% dye. The bodies were prepared by freezing a water-in-oil emulsion in liquid nitrogen. The emulsion comprised a continuous toluene phase containing polyvinyl acetate and a discontinuous phase comprising water and the dye. Sodium dioctylsulfosuccinate (AOT) was used as the surfactant.

A 5% solution of polyvinyl acetate in toluene was prepared by adding polyvinyl acetate (PVAc  $M_w = 83000$ ) to toluene. A sample of the solution (2ml) was stirred with a type RW11 Basic IKA paddle stirrer, and direct yellow 50 (0.01g) and AOT (0.25g) were added followed by water (6ml) to form an emulsion having 75% v/v of discontinuous phase.

#### Example 7a

The above emulsion was sprayed into liquid nitrogen from an airbrush. The frozen emulsion was placed in a freeze-drier overnight to give porous bodies in the form of a powder.



Example 7b

The above emulsion was placed in a beaker which was placed in liquid nitrogen to freeze the emulsion. The frozen emulsion in the beaker was placed in a freeze drier overnight to give a porous moulded body shaped as the inside of the beaker.

Example 7c

A beaker was placed in a thermostatic vessel and liquid nitrogen was placed in both the beaker and the vessel. The emulsion prepared above was added dropwise from a needle to the liquid nitrogen in the beaker using a A-99 FZ Razel syringe pump. The beaker was placed in a freeze drier overnight to give spherical beads

Example 8

An experiment was conducted in order to produce highly porous bodies containing a hydrophobic dye, which bodies are soluble or dispersible in non-aqueous media in which the polymeric material is polyvinyl acetate. These bodies contained about 28% w/w polymer, about 69% w/w surfactant and about 3% dye. The bodies were prepared by freezing a water-in-oil emulsion in liquid nitrogen. The emulsion comprised a continuous toluene phase containing polyvinyl acetate and the dye and a discontinuous phase comprising water. Sodium dioctylsulfosuccinate (AOT) was used as the surfactant.

A 5% solution of polyvinyl acetate in toluene was prepared by adding polyvinyl acetate (PVAc  $M_w = 83000$ ) to toluene. A sample of the solution (2ml) was stirred with a type RW11 Basic IKA paddle stirrer and solvent green 3 dye (0.01g) and AOT (0.25g

were added followed by water (6ml) to form an emulsion having 75% v/v of discontinuous phase.

Example 8a

- 5 The above emulsion was sprayed into liquid nitrogen from an airbrush. The frozen emulsion was placed in a freeze-drier overnight to give porous bodies in the form of a powder.

Example 8b

- 10 The above emulsion was placed in a beaker which was placed in liquid nitrogen to freeze the emulsion. The frozen emulsion in the beaker was placed in a freeze drier overnight to give a porous moulded body shaped as the inside of the beaker.

15 Example 9

- An experiment was conducted in order to produce highly porous bodies containing a hydrophobic dye, which bodies are soluble or dispersible in non-aqueous media in which the polymeric material is polyvinyl acetate. These bodies contained about 33% w/w polymer, about 54% w/w surfactant and 13% dye. The bodies were prepared by freezing a water-in-oil emulsion in liquid nitrogen. The emulsion comprised a continuous toluene phase containing polyvinyl acetate and the dye and a discontinuous phase comprising water. Sodium dioctylsulfosuccinate (AOT) was used as the surfactant.

- A 2.5% solution of polyvinyl acetate in toluene was prepared by adding polyvinyl acetate (PVAc  $M_w = 83000$ ) to toluene. A sample of the solution (12ml) was stirred with a type RW11 Basic IKA paddle stirrer and solvent green 3 dye (0.12g) [Please check this seems higher than in other examples] and AOT (0.5g) were added

followed by water (12ml) to form an emulsion having 75% v/v of discontinuous phase.

A beaker was placed in a thermostatic vessel [What is this?] and liquid nitrogen was placed in both the beaker and the vessel. The emulsion prepared above was added dropwise from a needle [Gauge 19] to the liquid nitrogen in the beaker using a A-99 FZ Razel syringe pump. The beaker was placed in a freeze drier overnight to give spherical beads [diameter 2-3mm]

#### Example 10

An experiment was conducted in order to produce highly porous bodies containing a hydrophilic dye, which bodies are soluble or dispersible in non-aqueous media in which the polymeric material is polystyrene. These bodies contained about 60% w/w polymer, about 16% w/w surfactant and about 24% w/w dye. The bodies were prepared by freezing a water-in-oil emulsion in liquid nitrogen. The emulsion comprised a continuous cyclohexane phase containing polystyrene and a discontinuous phase comprising water and the dye. Sodium dioctylsulfosuccinate (AOT) was used as the surfactant.

A 10% solution of polystyrene in cyclohexane was prepared by adding polystyrene (PS ex Polysciences Inc  $M_w = 30000$ ) to cyclohexane. A sample of the solution (2ml) was stirred with a type RW11 Basic IKA paddle stirrer and AOT (0.054g) and an aqueous solution of methyl orange (0.16g) were added to form an emulsion having 50% v/v of discontinuous phase.

The above emulsion was sprayed into liquid nitrogen from an airbrush. The frozen emulsion was placed in a freeze-drier overnight to give porous bodies in the form of a powder.

The dissolution time was determined using a sample of the powder (0.1g) in cyclohexane (2ml) at 20°C and was 22 seconds.

5 Example 11

An experiment was conducted in order to produce highly porous bodies containing a hydrophobic dye, which bodies are soluble or dispersible in non-aqueous media in which the polymeric material is polystyrene. These bodies contained about 60% w/w polymer,  
10 about 16% w/w surfactant and about 24% w/w dye. The bodies were prepared by freezing a water-in-oil emulsion in liquid nitrogen. The emulsion comprised a continuous cyclohexane phase containing polystyrene and a discontinuous phase comprising water and the dye. Sodium dioctylsulfosuccinate (AOT) was used as the  
15 surfactant.

A 10% solution of styrene in cyclohexane was prepared by adding polystyrene (PS ex Polysciences Inc  $M_w = 30000$ ) and oil blue dye (0.08 wt%) to cyclohexane. A sample of the solution (2ml)  
20 was stirred with a type RW11 Basic IKA paddle stirrer and AOT (0.054g) and water (2ml) were added to form an emulsion having 50% v/v of discontinuous phase.

The above emulsion was sprayed into liquid nitrogen from an  
25 airbrush. The frozen emulsion was placed in a freeze-drier overnight to give porous bodies in the form of a powder.

The dissolution time was determined using a sample of the powder (0.1g) in cyclohexane (2ml) at 20°C and was 11 seconds.

CLAIMS

1) Porous bodies which are soluble or dispersible in non-aqueous media comprising a three dimensional open-cell lattice containing

5 (a) 10 to 70% by weight of a polymeric material which is soluble in water immiscible non-aqueous media and

(b) 30 to 90% by weight of a surfactant,  
said porous bodies having an intrusion volume as measured by mercury porosimetry of at least about 3 ml/g

10

2) Porous bodies as claimed in claim 1 wherein the bodies are in the form of powders, beads or moulded bodies

3) Porous bodies as claimed in claim 1 or claim 2 wherein the  
15 polymeric material is a homopolymer or copolymer made from one or more of the following (co)monomers:-

Alkenes; dienes; urethanes; vinyl esters; styrenics; alkyl  
(meth)acrylates; alkyl (meth)acrylamides; (meth)acrylonitrile;  
vinyl ethers; imides; amides; anhydrides, esters; ethers,  
20 carbonates; isothiocyanates; silanes; siloxanes; sulphones;  
aliphatic and aromatic alcohols; aromatic and aliphatic acids;  
aromatic and aliphatic amines

4) Porous bodies as claimed in claim 3 wherein the polymeric  
25 material is polystyrene or polyvinyl acetate

5) Porous bodies as claimed in any preceding claim wherein the porous polymeric bodies have water soluble and/or water insoluble materials incorporated into the polymeric lattice

30

6) Water soluble porous polymeric bodies as claimed in claim 5 wherein the water soluble material is selected from water soluble vitamins; water soluble fluorescers; activated aluminium

chlorohydrate; transition metal complexes used as bleaching catalysts; water soluble polymers; diethylenetriaminepentaacetic acid (DTPA); primary and secondary alcohol sulphates containing greater than C8 chain length or mixtures thereof

5

7) Water soluble porous polymeric bodies as claimed in claim 5 wherein the water insoluble material is selected from antimicrobial agents; antidandruff agent; skin lightening agents; fluorescing agents; antifoams; hair conditioning agents; fabric  
10 conditioning agents; skin conditioning agents; dyes; UV protecting agents; bleach or bleach precursors; antioxidants; insecticides; pesticides; herbicides; perfumes or precursors thereto; flavourings or precursors thereto; pharmaceutically active materials; hydrophobic polymeric materials and mixtures  
15 thereof.

8) A method for preparing water dispersible or water soluble porous bodies which are soluble or dispersible in non-aqueous media comprising a three dimensional open-cell lattice containing  
20 (a) 10 to 70% by weight of a polymeric material which is soluble in water immiscible non-aqueous media and  
(b) 30 to 90% by weight of a surfactant,  
said porous bodies having an intrusion volume as measured by mercury porosimetry (as hereinafter described) of at least about  
25 3 ml/g

comprising the steps of:

- a) providing an intimate mixture of the polymeric material and the surfactant in a liquid medium
- b) providing a fluid freezing medium at a temperature  
30 effective for rapidly freezing the liquid medium;
- c) cooling the liquid medium with the fluid freezing medium at a temperature below the freezing point of the liquid

medium for a period effective to rapidly freeze the liquid medium; and

d) freeze-drying the frozen liquid medium to form the porous bodies by removal of the liquid medium by sublimation.

5

9) A method as claimed in claim 8 wherein the cooling of the liquid medium is accomplished by spraying an atomised water-in-oil emulsion into the fluid freezing medium; by dropping drops of a water-in-oil emulsion into the fluid freezing medium or by  
10 pouring a water-in-oil emulsion into a mould and cooling the emulsion in the mould.

10) A method as claimed in claim 8 or 9 wherein the polymeric material is a homopolymer or copolymer made from one or more of  
15 the following (co)monomers:-

Alkenes; dienes; urethanes; vinyl esters; styrenics; alkyl (meth)acrylates; alkyl (meth)acrylamides; (meth)acrylonitrile; vinyl ethers; imides; amides; anhydrides, esters; ethers, carbonates; isothiocyanates; silanes; siloxanes; sulphones;  
20 aliphatic and aromatic alcohols; aromatic and aliphatic acids; aromatic and aliphatic amines

11) A method as claimed in claim 10 wherein the polymeric material is polystyrene or polyvinyl acetate

25

12) A method as claimed in any one of claims 9 to 11 wherein the surfactant is non-ionic, anionic, cationic, or zwitterionic

13) A method as claimed in any one of claims 9 to 12 wherein the  
30 surfactant is solid at ambient temperature

14) A method as claimed in any one of claim 9 to 13 wherein the surfactant has an HLB value of 3 to 6

- 15) A method as claimed in any one of claims 9 to 14 wherein the surfactant is selected from ethoxylated triglycerides; fatty alcohol ethoxylates; alkylphenol ethoxylates; fatty acid ethoxylates; fatty amide ethoxylates; fatty amine ethoxylates; sorbitan alkanoates; ethylated sorbitan alkanoates; alkyl ethoxylates; pluronics; alkyl polyglucosides; stearyl ethoxylates; alkyl polyglycosides; alkylether sulfates; alkylether carboxylates; alkylbenzene sulfonates; alkylether phosphates; dialkyl sulfosuccinates; alkyl sulfonates; soaps; alkyl sulfates; alkyl carboxylates; alkyl phosphates; paraffin sulfonates; secondary n-alkane sulfonates; alpha-olefin sulfonates; isethionate sulfonates; fatty amine salts; fatty diamine salts; quaternary ammonium compounds; phosphonium surfactants; sulfonium surfactants; sulfonxonium surfactants; N-alkyl derivatives of amino acids (such as glycine, betaine, aminopropionic acid); imidazoline surfactants; amine oxides; amidobetaines; and mixtures thereof
- 16) A method as claimed in claim 9 wherein the intimate mixture is a water-in-oil emulsion
- 17) A method as claimed in claim 16 wherein the discontinuous phase of the emulsion comprises 10 to 95% by volume of the emulsion
- 18) A method as claimed in claim 16 wherein the discontinuous phase of the emulsion comprises 20 to 60% by volume of the emulsion
- 19) A method as claimed in claim 16 wherein the discontinuous phase of the emulsion is selected from alkanes; cyclic hydrocarbons; halogenated alkanes; esters; ketones;



ethers; volatile cyclic silicones and mixtures thereof

20) Solutions or dispersions comprising a polymeric material and  
surfactant formed by exposing the porous bodies of any one of  
5 claims 1 to 7 to a non-aqueous medium.

21) Solutions or dispersions comprising a polymeric  
material, surfactant and a hydrophilic material formed by  
exposing the porous bodies of claim 5 having the hydrophilic  
10 material contained therein to a non-aqueous medium.

Abstract

Porous bodies which are soluble or dispersible in non-aqueous  
5 media comprising a three dimensional open-cell lattice containing  
(a) 10 to 70% by weight of a polymeric material which is soluble  
in water immiscible non-aqueous media and  
(b) 30 to 90% by weight of a surfactant,  
said porous bodies having an intrusion volume as measured by  
10 mercury porosimetry of at least about 3 ml/g

